


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:230.15V I:0.157A P:33.66W PF:0.930 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4694.6x1 lm		
NAME: T1242-900mA-15D-3090		
SPEC.: Xi 42W/a0.9-1.05A 40v		
MFR.: SOTEN		

DATA OF LAMP		PHOTOMETRIC DATA Eff: 118.42 lm/W			
MODEL	PW 1208	Imax (cd)	23737	S/MH (C0/180)	0.32
NOMINAL POWER (W)	36	LOR (%)	84.9	S/MH (C90/270)	0.30
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	3985.8	η UP,DN (C0-180)	0.0,43.1
NOMINAL FLUX (lm)	4694.6	CIE CLASS	DIRECT	η UP,DN (C180-360)	0.0,41.8
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	230	η down (%)	84.9	CIBSE SHR MAX	0.30

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

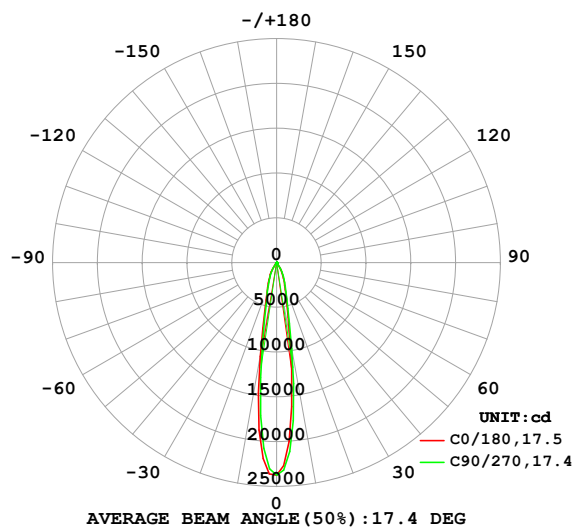

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

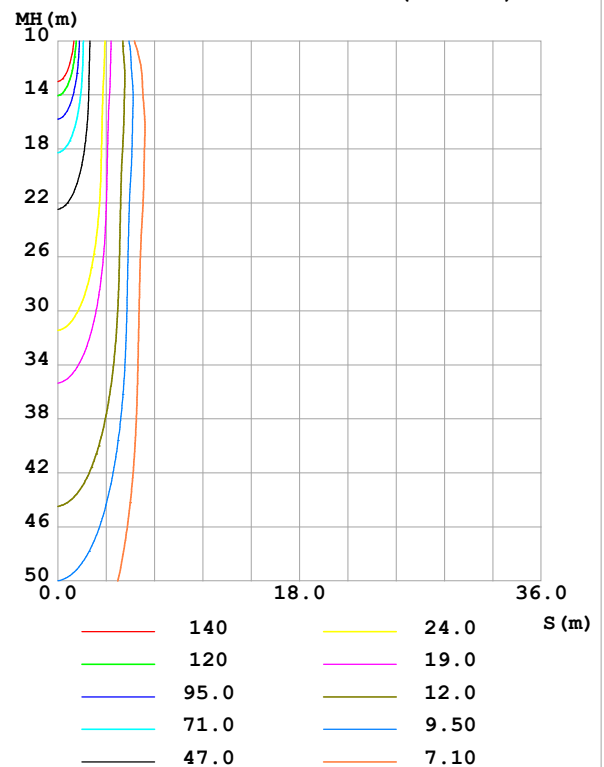

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: MEDIUM
Temperature: 25.3 °C
Operators: Li
Test Date: 2024-08-28

γ Range: 0 - 90DEG
 γ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.485
Humidity: 65.0%
Test Distance: 8.458m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	853.3	895.9	978.2	1069	1066	996.2	916.8	843.6	0- 10	1512	1512	37.9, 32.2
20	270.0	277.8	288.8	299.6	295.3	286.5	274.3	264.0	10- 20	1364	2876	72.1, 61.3
30	103.0	109.8	117.1	124.3	122.8	117.3	108.6	99.96	20- 30	858.4	3734	93.7, 79.5
40	0.7861	0.8346	1.058	1.267	1.121	0.9805	0.9077	0.8399	30- 40	243.8	3978	99.8, 84.7
50	0.3088	0.3456	0.4019	0.3885	0.3106	0.2922	0.3019	0.3051	40- 50	4.114	3982	99.9, 84.8
60	0.1411	0.1713	0.2014	0.1730	0.1317	0.1248	0.1298	0.1355	50- 60	2.045	3984	100, 84.9
70	0.0606	0.0707	0.0801	0.0664	0.0524	0.0487	0.0519	0.0474	60- 70	0.9949	3985	100, 84.9
80	0.0306	0.0315	0.0301	0.0306	0.0244	0.0228	0.0239	0.0265	70- 80	0.4191	3986	100, 84.9
90	0.0270	0.0254	0.0265	0.0255	0.0249	0.0234	0.0239	0.0235	80- 90	0.2750	3986	100, 84.9
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:X10cd									UNIT:lm		

Conical surface Flux(90deg): 3980.8 lm

%lum = 99.9%

%lamp = 84.8%

Conical surface Flux(130deg): 3984.8 lm

%lum = 100.0%


%lamp = 84.9%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: MEDIUM
 Temperature: 25.3℃
 Operators: Li
 Test Date: 2024-08-28

γ Range: 0 - 90DEG
 γ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.485
 Humidity: 65.0%
 Test Distance: 8.458m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:230.15V I:0.157A P:33.66W PF:0.930 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4694.6x1 lm		
NAME: T1242-900mA-15D-3090		
SPEC.: Xi 42W/a0.9-1.05A 40v		
MFR.: SOTEN		

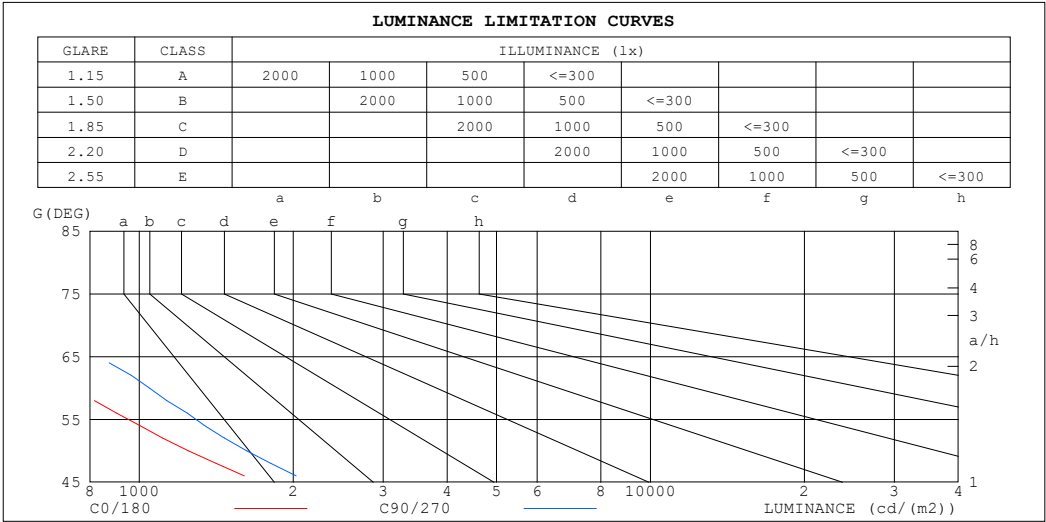

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	820	790
80	457	450
75	450	517
70	461	608
65	633	906
60	734	1046
55	1028	1374
50	1249	1624
45	1837	2308


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: MEDIUM
Temperature:25.3℃
Operators:Li
Test Date:2024-08-28

γ Range: 0 - 90DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.485
Humidity:65.0%
Test Distance:8.458m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.15V I:0.157A P:33.66W PF:0.930 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0		
Lamp Flux:4694.6x1 lm		
NAME: T1242-900mA-15D-3090		
SPEC.: Xi 42W/a0.9-1.05A 40v		
MFR.: SOTEN		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.01	1.01	1.01	.99	.99	.99	.94	.94	.94	.90	.90	.90	.87	.87	.87	.85
1.0	.96	.94	.93	.94	.93	.91	.91	.90	.88	.88	.87	.86	.85	.84	.83	.82
2.0	.91	.89	.87	.90	.88	.86	.87	.85	.84	.85	.83	.82	.83	.81	.80	.79
3.0	.87	.84	.82	.86	.83	.81	.84	.82	.80	.82	.80	.79	.80	.79	.77	.76
4.0	.84	.80	.78	.83	.80	.77	.81	.79	.77	.80	.77	.76	.78	.76	.75	.74
5.0	.81	.77	.75	.80	.77	.74	.79	.76	.74	.77	.75	.73	.76	.74	.72	.71
6.0	.78	.74	.72	.77	.74	.71	.76	.73	.71	.75	.72	.71	.74	.72	.70	.69
7.0	.75	.72	.69	.75	.71	.69	.74	.71	.69	.73	.70	.68	.72	.70	.68	.67
8.0	.73	.69	.67	.72	.69	.67	.72	.69	.66	.71	.68	.66	.70	.68	.66	.65
9.0	.71	.67	.65	.70	.67	.65	.70	.67	.64	.69	.66	.64	.68	.66	.64	.63
10.0	.69	.65	.63	.68	.65	.63	.68	.65	.63	.67	.64	.63	.67	.64	.62	.62

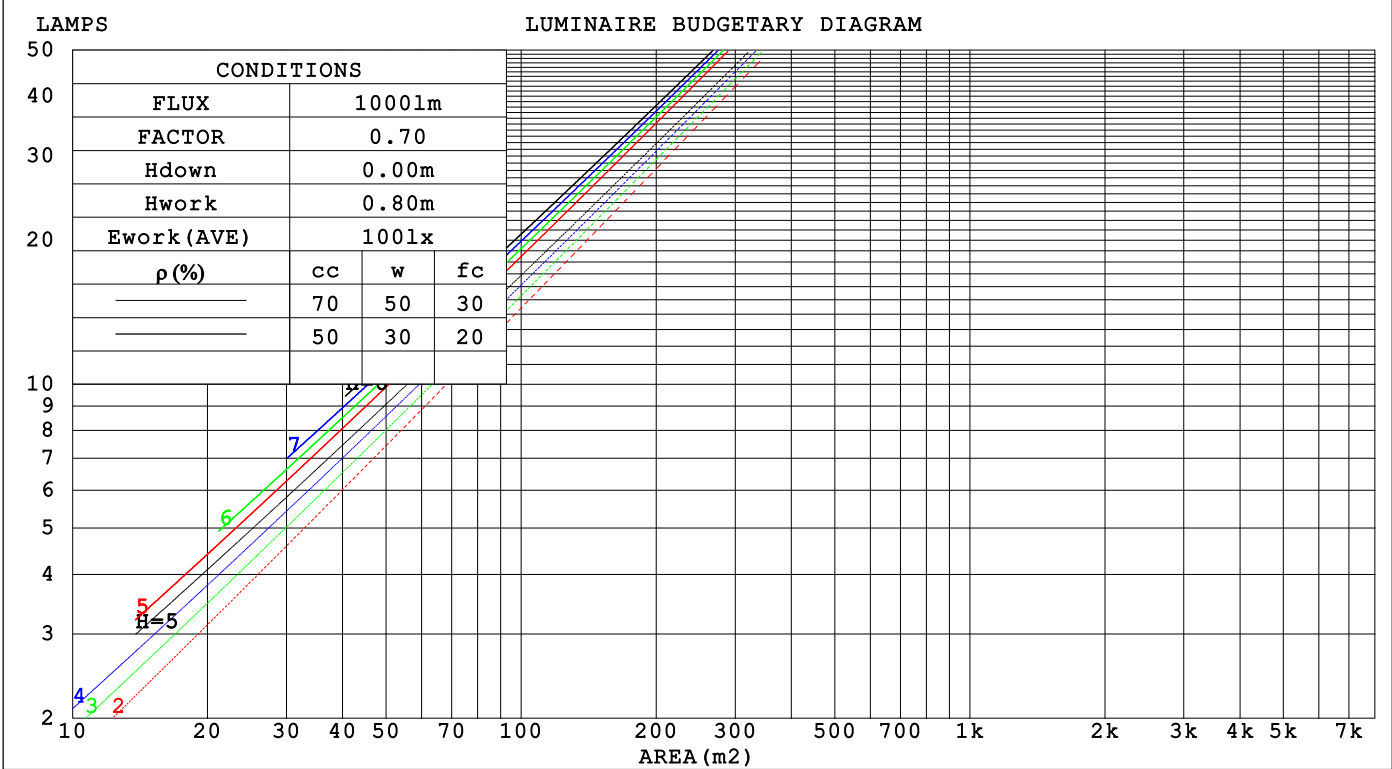

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: MEDIUM
Temperature:25.3℃
Operators:Li
Test Date:2024-08-28

γ Range: 0 - 90DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.485
Humidity:65.0%
Test Distance:8.458m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:230.15V I:0.157A P:33.66W PF:0.930 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4694.6x1 lm		
NAME: T1242-900mA-15D-3090		
SPEC.: Xi 42W/a0.9-1.05A 40v		
MFR.: SOTEN		

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.117	.066	.021	.111	.063	.020	.101	.058	.018	.091	.053	.017	.082	.048	.015															
2.0	.109	.060	.018	.104	.057	.018	.095	.053	.016	.087	.049	.015	.080	.045	.014															
3.0	.101	.054	.016	.098	.052	.016	.090	.049	.015	.084	.046	.014	.077	.043	.013															
4.0	.095	.050	.015	.092	.048	.014	.086	.046	.014	.080	.043	.013	.075	.041	.012															
5.0	.090	.046	.013	.087	.045	.013	.082	.043	.013	.077	.041	.012	.073	.039	.012															
6.0	.085	.043	.012	.083	.042	.012	.078	.040	.012	.074	.039	.011	.070	.037	.011															
7.0	.081	.040	.011	.079	.039	.011	.075	.038	.011	.071	.037	.011	.068	.035	.010															
8.0	.077	.038	.011	.075	.037	.011	.072	.036	.010	.069	.035	.010	.066	.034	.010															
9.0	.074	.036	.010	.072	.035	.010	.069	.034	.010	.066	.033	.010	.064	.032	.009															
10.0	.071	.034	.009	.069	.034	.009	.067	.033	.009	.064	.032	.009	.062	.031	.009															

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.162	.162	.162	.138	.138	.138	.094	.094	.094	.054	.054	.054	.017	.017	.017	
1.0	.143	.134	.126	.122	.115	.108	.084	.079	.075	.048	.046	.043	.015	.015	.014	
2.0	.128	.113	.100	.109	.097	.086	.075	.067	.060	.043	.039	.035	.014	.013	.012	
3.0	.115	.096	.081	.099	.083	.070	.068	.058	.049	.039	.034	.029	.013	.011	.010	
4.0	.105	.083	.067	.090	.072	.058	.062	.050	.041	.036	.029	.024	.011	.010	.008	
5.0	.096	.073	.056	.082	.063	.049	.057	.044	.034	.033	.026	.020	.011	.008	.007	
6.0	.088	.064	.047	.076	.056	.041	.052	.039	.029	.030	.023	.017	.010	.007	.006	
7.0	.082	.057	.040	.070	.050	.035	.049	.035	.025	.028	.021	.015	.009	.007	.005	
8.0	.076	.052	.035	.066	.045	.030	.045	.031	.021	.026	.019	.013	.009	.006	.004	
9.0	.072	.047	.030	.062	.041	.026	.043	.029	.019	.025	.017	.011	.008	.006	.004	
10.0	.067	.043	.026	.058	.037	.023	.040	.026	.016	.024	.015	.010	.008	.005	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: MEDIUM
 Temperature:25.3℃
 Operators:Li
 Test Date:2024-08-28

γ Range: 0 - 90DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.485
 Humidity:65.0%
 Test Distance:8.458m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:230.15V I:0.157A P:33.66W PF:0.930 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4694.6x1 lm										
NAME: T1242-900mA-15D-3090										
SPEC.: Xi 42W/a0.9-1.05A 40v										
MFR.: SOTEN										
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	14.7	15.4	14.9	15.5	15.7	16.1	16.7	16.3	16.9	17.0
3H	14.6	15.2	14.8	15.4	15.6	15.9	16.5	16.2	16.7	16.9
4H	14.5	15.1	14.7	15.3	15.5	15.9	16.4	16.1	16.6	16.9
6H	14.4	15.0	14.7	15.2	15.4	15.8	16.3	16.1	16.6	16.8
8H	14.4	14.9	14.7	15.1	15.4	15.7	16.3	16.0	16.5	16.8
12H	14.3	14.8	14.6	15.1	15.4	15.7	16.2	16.0	16.5	16.7
4H 2H	14.5	15.1	14.7	15.3	15.5	15.9	16.4	16.1	16.6	16.9
3H	14.3	14.8	14.6	15.1	15.4	15.7	16.2	16.0	16.5	16.7
4H	14.2	14.7	14.6	15.0	15.3	15.6	16.1	15.9	16.3	16.6
6H	14.1	14.5	14.5	14.9	15.2	15.5	15.9	15.9	16.2	16.6
8H	14.1	14.5	14.4	14.8	15.2	15.4	15.8	15.8	16.2	16.5
12H	14.0	14.4	14.4	14.7	15.1	15.4	15.7	15.8	16.1	16.5
8H 4H	14.1	14.4	14.4	14.8	15.2	15.4	15.8	15.8	16.2	16.5
6H	13.9	14.3	14.4	14.7	15.1	15.3	15.6	15.7	16.0	16.4
8H	13.9	14.2	14.3	14.6	15.0	15.3	15.5	15.7	16.0	16.4
12H	13.8	14.1	14.3	14.5	15.0	15.2	15.4	15.7	15.9	16.3
12H 4H	14.0	14.4	14.4	14.7	15.1	15.4	15.7	15.8	16.1	16.5
6H	13.9	14.2	14.3	14.6	15.0	15.3	15.5	15.7	16.0	16.4
8H	13.8	14.1	14.3	14.5	15.0	15.2	15.4	15.7	15.9	16.3
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 3.5 / - 2.4					+ 6.2 / - 5.6				
1.5H	+ 5.2 / - 1.9					+ 8.7 / - 4.8				
2.0H	+ 1.8 / - 1.3					+ 2.1 / - 1.3				

CIE Pub.117, 4695 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 5.4)
 Area: 0.0038465 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: MEDIUM
 Temperature:25.3℃
 Operators:Li
 Test Date:2024-08-28

γ Range: 0 - 90DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.485
 Humidity:65.0%
 Test Distance:8.458m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test: U:230.15V I:0.157A P:33.66W PF:0.930 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4694.6x1 lm		
NAME: T1242-900mA-15D-3090		
SPEC.: Xi 42W/a0.9-1.05A 40v		
MFR.: SOTEN		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	78	73	70	77	73	70	77	72	70	67
0.80	83	79	76	83	79	76	82	78	76	73
1.00	87	82	80	86	82	79	85	82	79	76
1.25	90	86	83	89	85	83	87	84	82	79
1.50	92	88	86	91	87	85	89	86	84	81
2.00	93	90	88	92	89	87	90	88	86	82
2.50	95	92	89	93	91	89	91	89	87	82
3.00	96	93	91	94	92	90	91	90	88	83
4.00	97	95	94	96	94	92	93	91	90	84
5.00	98	97	95	97	95	94	93	92	91	85
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: MEDIUM
 Temperature: 25.3°C
 Operators: Li
 Test Date: 2024-08-28

γ Range: 0 - 90DEG
 γ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.485
 Humidity: 65.0%
 Test Distance: 8.458m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:230.15V I:0.157A P:33.66W PF:0.930 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4694.6x1 lm		
NAME: T1242-900mA-15D-3090		
SPEC.: Xi 42W/a0.9-1.05A 40v		
MFR.: SOTEN		

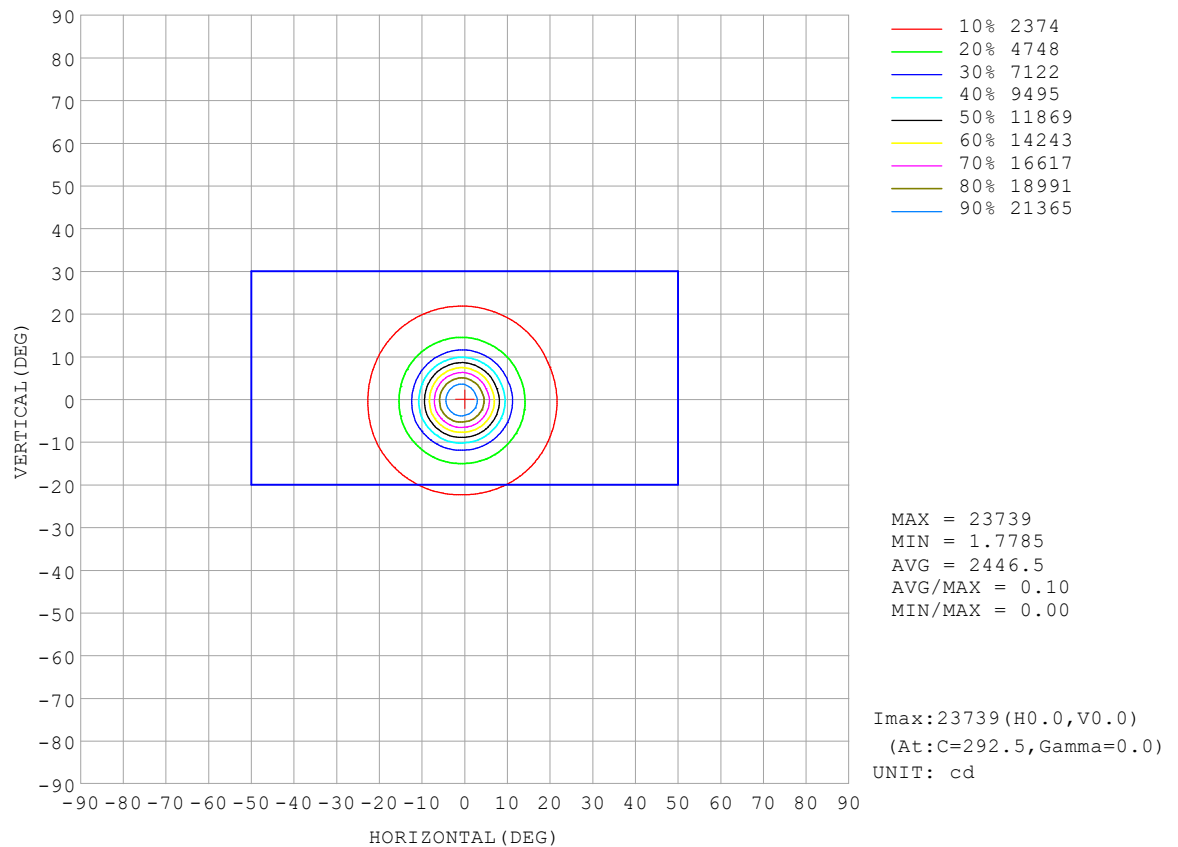


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: MEDIUM
 Temperature:25.3℃
 Operators:Li
 Test Date:2024-08-28

γ Range: 0 - 90DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.485
 Humidity:65.0%
 Test Distance:8.458m [K=1.0000]
 Remarks:

AAI Figure

Test:U:230.15V I:0.157A P:33.66W PF:0.930 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4694.6x1 lm		
NAME: T1242-900mA-15D-3090		
SPEC.: Xi 42W/a0.9-1.05A 40v		
MFR.: SOTEN		

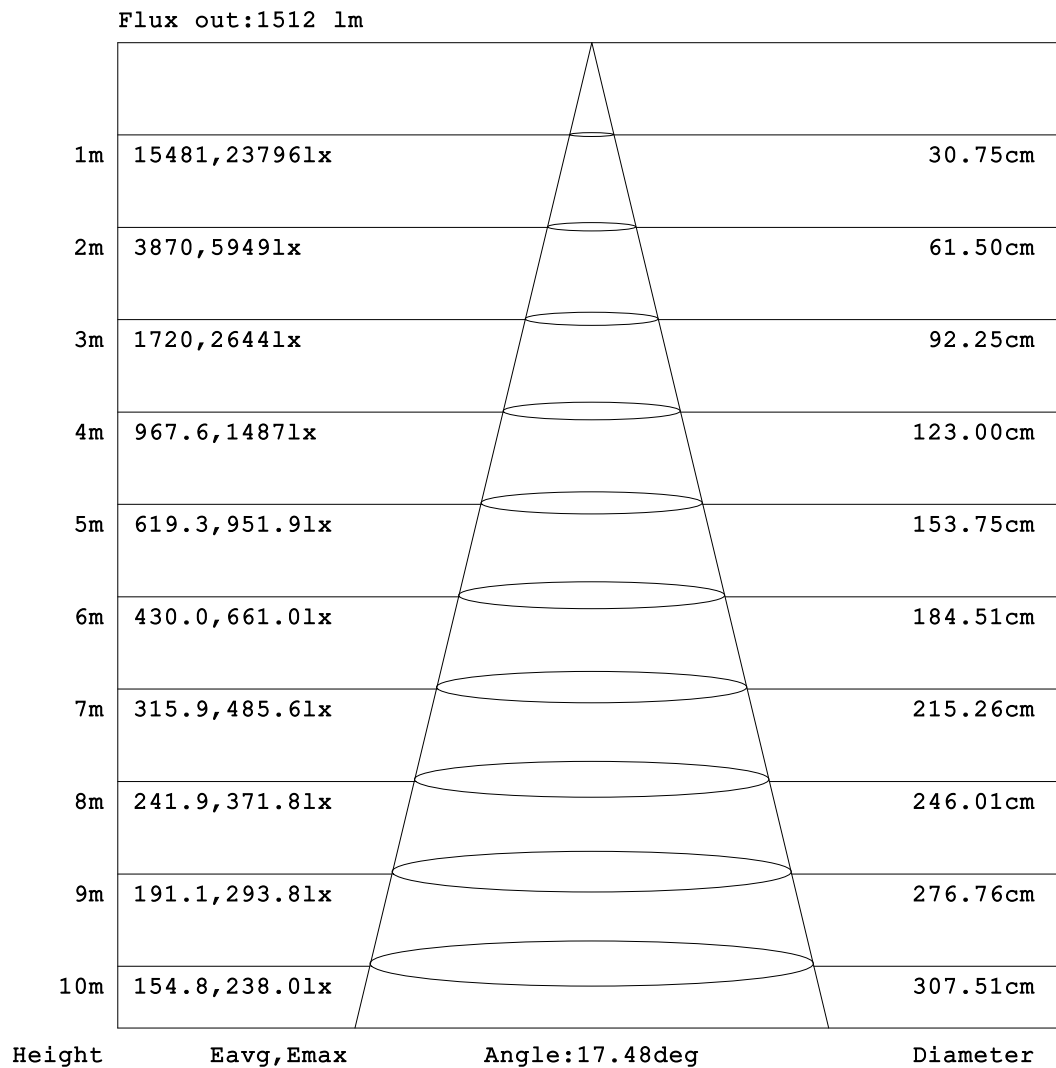


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: MEDIUM
 Temperature:25.3℃
 Operators:Li
 Test Date:2024-08-28

γ Range: 0 - 90DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.485
 Humidity:65.0%
 Test Distance:8.458m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test: U:230.15V I:0.157A P:33.66W PF:0.930 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4694.6x1 lm		
NAME: T1242-900mA-15D-3090		
SPEC.: Xi 42W/a0.9-1.05A 40v		
MFR.: SOTEN		

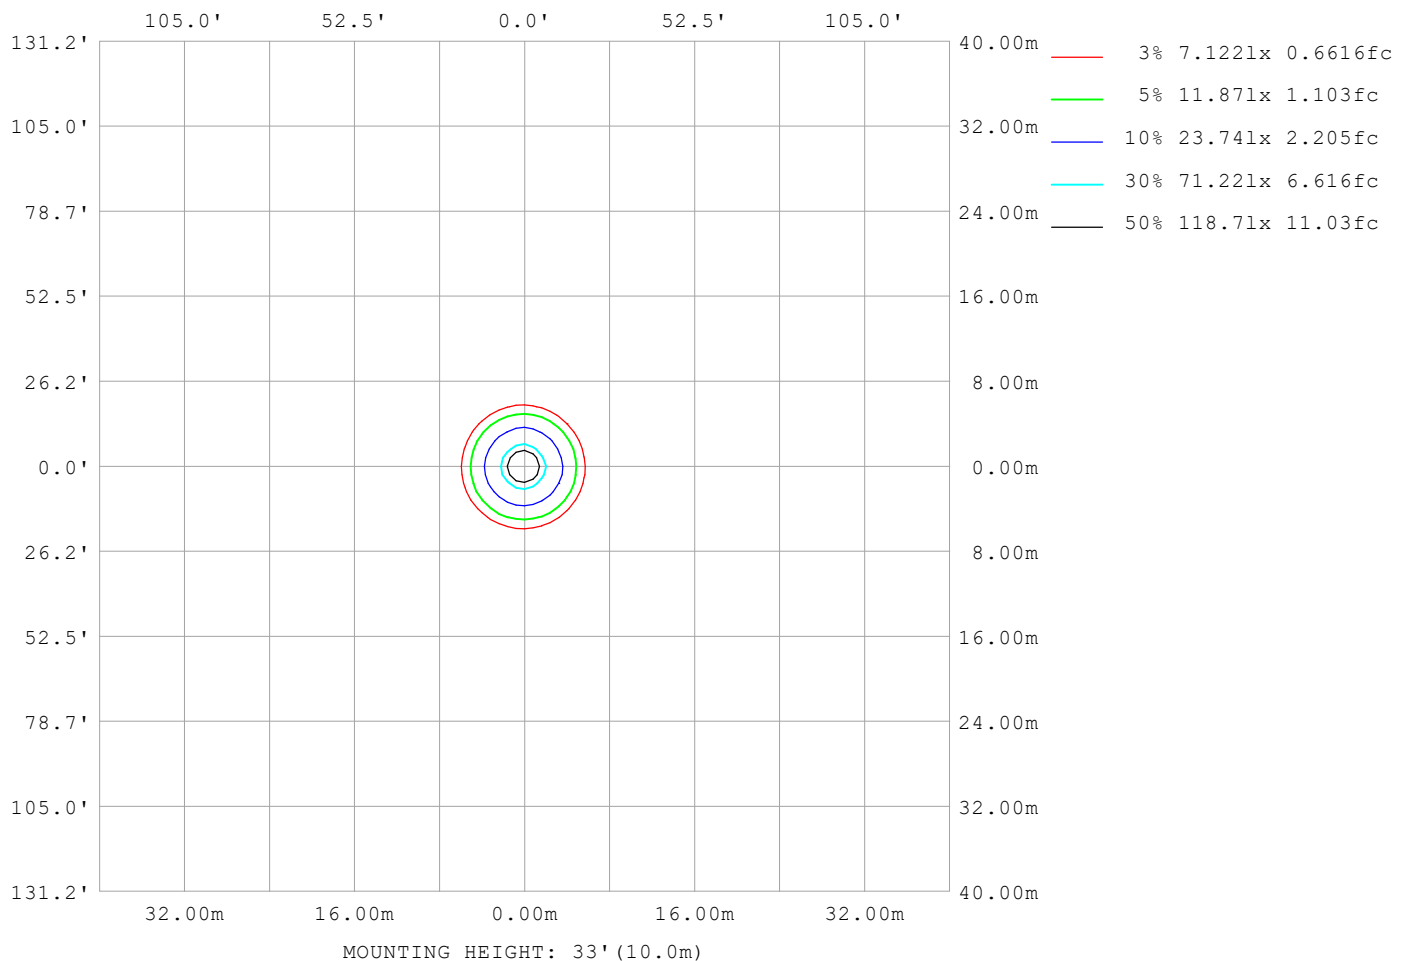

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: MEDIUM
 Temperature: 25.3°C
 Operators: Li
 Test Date: 2024-08-28

γ Range: 0 - 90DEG
 γ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.485
 Humidity: 65.0%
 Test Distance: 8.458m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:230.15V I:0.157A P:33.66W PF:0.930 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4694.6x1 lm		
NAME: T1242-900mA-15D-3090		
SPEC.: Xi 42W/a0.9-1.05A 40v		
MFR.: SOTEN		


AvgL	cd/m2
L_0~180 (65) av	553
L_0~180 (75) av	378
L_0~180 (85) av	778
L_90~270 (65) av	673
L_90~270 (75) av	396
L_90~270 (85) av	751
L_45 (65) av	596
L_45 (75) av	372
L_45 (85) av	728

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: MEDIUM
 Temperature:25.3℃
 Operators:Li
 Test Date:2024-08-28

γ Range: 0 - 90DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.485
 Humidity:65.0%
 Test Distance:8.458m [K=1.0000]
 Remarks:

Planar Illuminance Curve

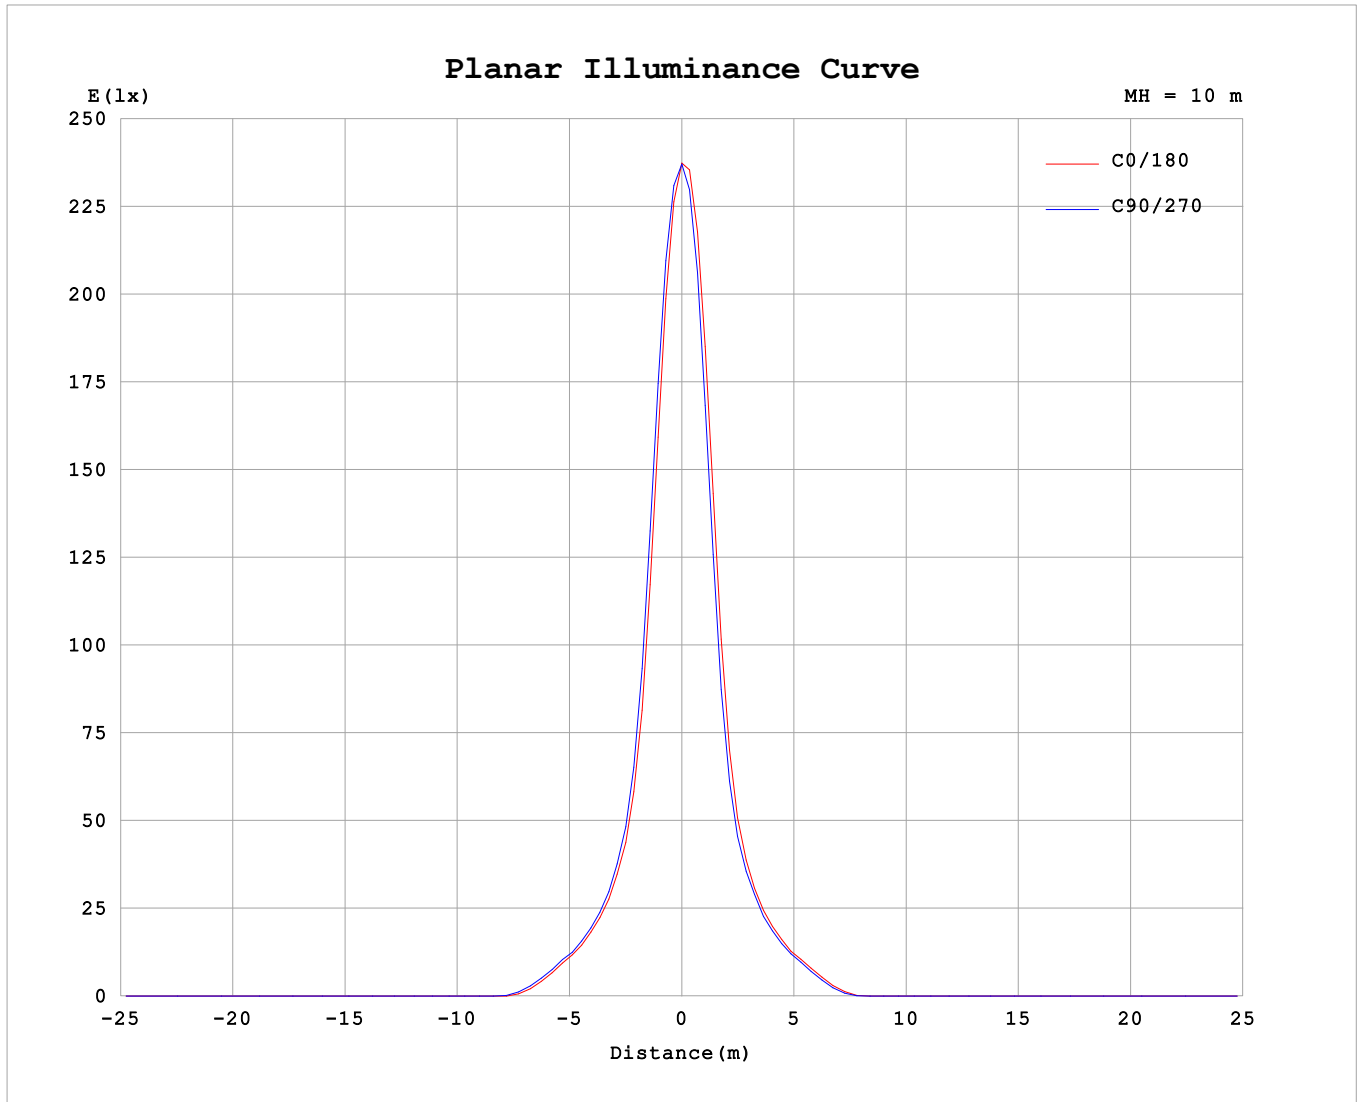

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: MEDIUM
Temperature: 25.3°C
Operators: Li
Test Date: 2024-08-28

γ Range: 0 - 90DEG
 γ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.485
Humidity: 65.0%
Test Distance: 8.458m [K=1.0000]
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.485
Humidity:65.0%
Test Distance:8.458m [K=1.0000]
Remarks:

```